

# 2824HS

## CMOS X-ray Detector



The 2824HS is a dynamic X-ray detector designed for industrial NDT, pre-clinical and clinical applications, with a pixel pitch of 100  $\mu\text{m}$  and a choice of high-efficiency, high-resolution CsI or Gadox scintillator. It is ideal for CBCT or fluoroscopy.

The innovative sensor design enables a frame rate of up to 90 fps in full resolution and higher speeds in region of interest or binned modes.

This detector employs a state-of-the-art CMOS sensor with 14-bit digital outputs and two gain modes offering a high dynamic range mode or a high sensitivity mode ideal for low dose, real-time imaging. The sensor is permanently bonded to a fibre optic plate (FOP) to enhance image quality and make the device more radiation tolerant.

For developers, a windows-based SDK is available with DLLs for Windows x64. These include C++ and .NET wrappers for easy integration with customised software. Library functions include dark subtraction, gain correction and defect correction. Example code is provided, including a simple Graphical User Interface. The SDK supports Camera Link, 5 GigE and USB 3.0 communications.

### Key Features

---

**Fast, low noise imaging with minimal image lag**

---

**CMOS sensor bonded to fibre optic plate (FOP)**

---

**High Sensitivity and High Dynamic Range modes**

---

**High speed, flexible region of interest**

---

**Choice of high resolution / high sensitivity CsI scintillator**

---


**Spectrum Logic provides a Windows SDK for rapid design-in**

---

## Technical Specifications

<b>SENSOR</b>	
Pixel Size	100 $\mu$ m
Sensitive Area	280.3 $\times$ 240.1 mm <sup>2</sup>
Pixel Matrix	2803 $\times$ 2401
<b>MAX FRAME RATE</b>	
Frame Rate Full Resolution	90 fps
Frame Rate Binned 2 $\times$ 2	110 fps
<b>IMAGE PERFORMANCE</b>	
Dynamic Range - High Sensitivity Mode	70
Dynamic Range - High Dynamic Range Mode	74
Bit Depth	14-bit
Max Energy	225 kV
<b>SCINTILLATOR, WINDOW &amp; FOP OPTIONS</b>	
Scintillator	High Efficiency CsI
	High Resolution CsI
	Various Gadox Screens
X-ray Window Material	Carbon Fibre
FOP	2 or 5 mm
<b>MECHANICAL</b>	
Weight (3 mm FOP)	Max 10 kg
Dimensions	315.0 $\times$ 316.5 $\times$ 53.0 mm <sup>3</sup>
<b>COMMUNICATIONS</b>	
Camera Link	Full @ 75 Mpixel/s
GigE	10 GigE
USB	High Speed USB 3.0
Trigger Mode	Continuous, SW, External Trigger
Software Support	64-bit Windows® OS from Windows 10
<b>POWER</b>	
Power Supply	12 to 24 V
Max Dissipation	22 W
<b>TEMPERATURE RANGE</b>	
Operating Range	+5 °C to +40 °C
Storage Range	-20 °C to +55 °C

# SpectrumLogic

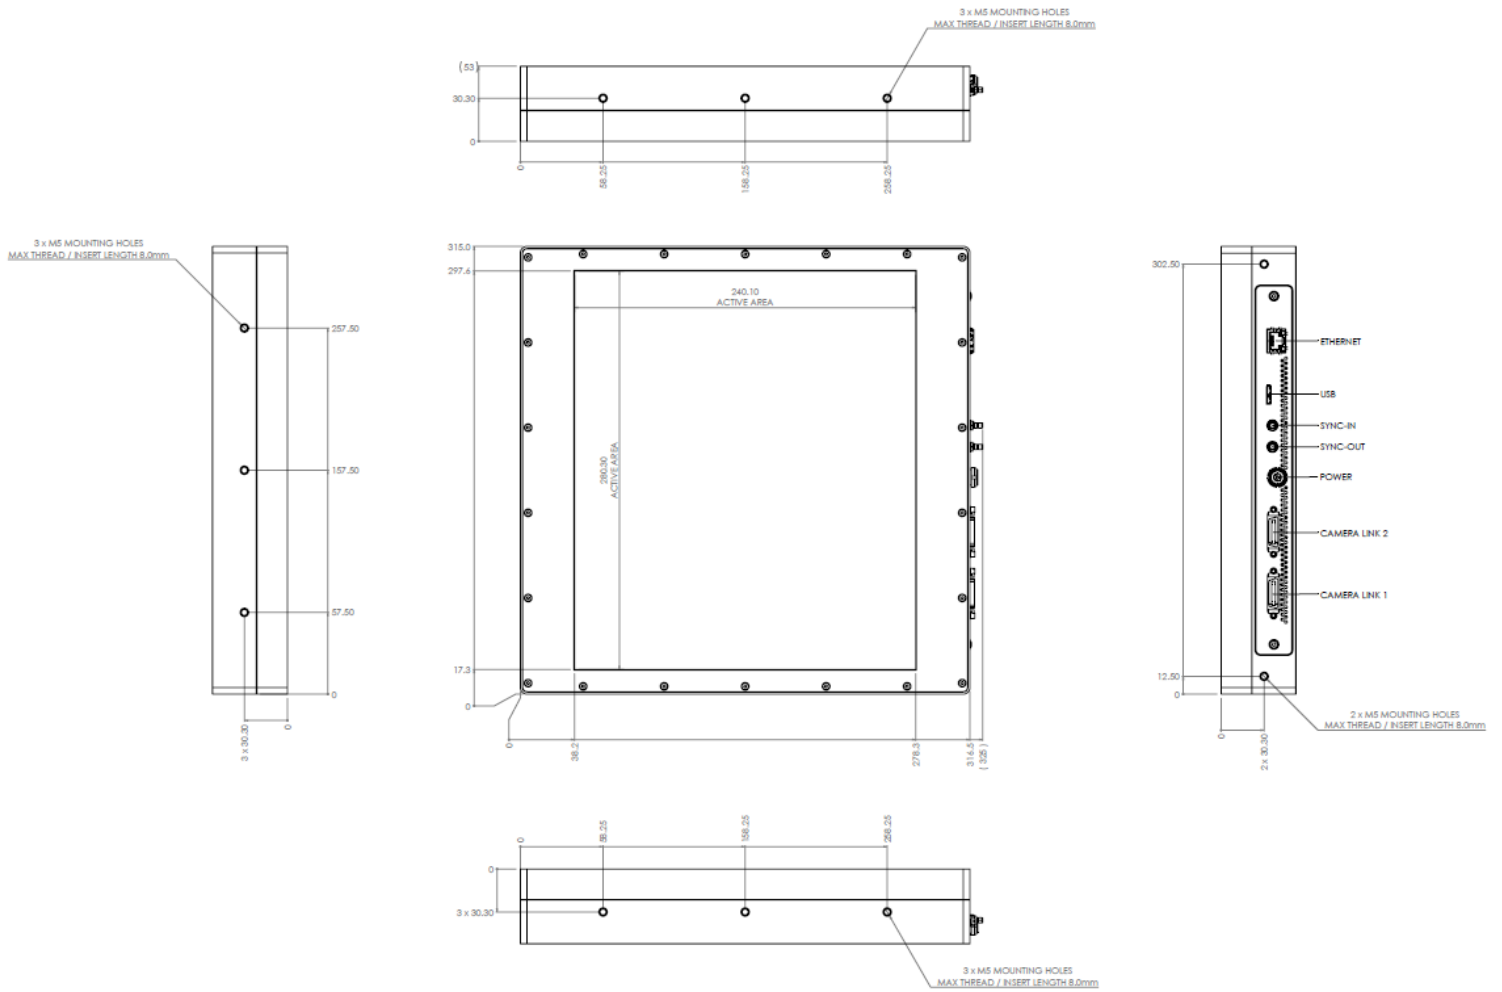

Unless otherwise specified, Spectrum Logic X-ray Detectors are components intended to be integrated into products by X-ray system manufacturers.

System manufacturers are responsible for qualifying and validating their products for their intended uses and meeting all applicable regulatory requirements.

Contents in this document are subject to change without notice. ©2021 Spectrum Logic Limited. All Rights reserved.

## **SPECTRUM LOGIC Limited**

Highgate Business Centre, 33 Greenwood Place, London NW5 1LB, UK

Version 2.2

[www.spectrumlogic.com](http://www.spectrumlogic.com)